


COMMERCIAL
22ft Wide

22ft COMMERCIAL POLYTUNNEL

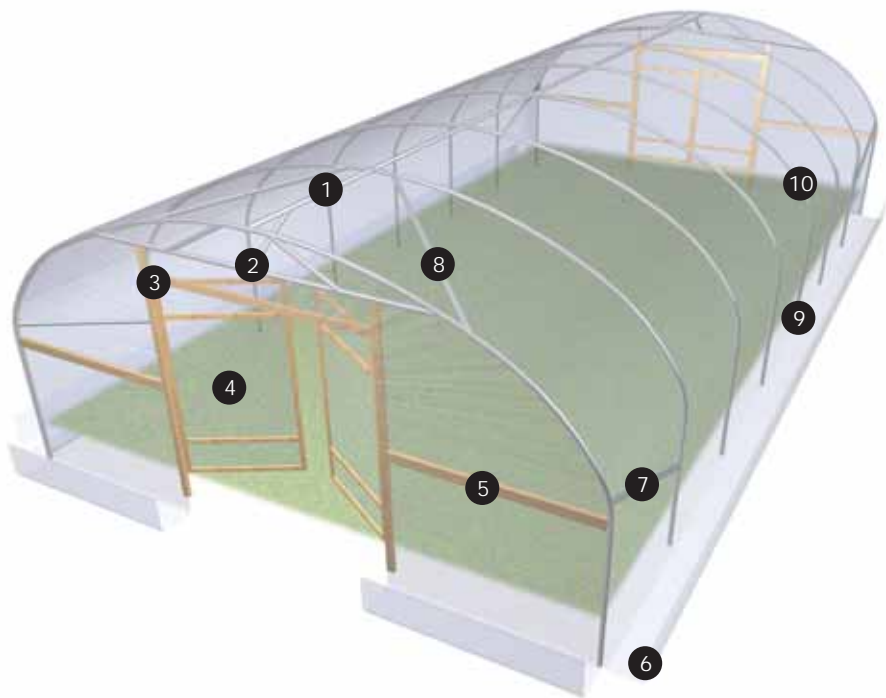

KEY FEATURES...

- 1 Ridge tube
- 2 Door rails x2 and stabiliser bars x6
- 3 Door frames x2
- 4 Double hinged doors with polythene x2
- 5 Timber outrigger strengtheners
- 6 Cover trenched into ground
- 7 Side stabiliser bars x4
- 8 Roof stabiliser bars x4
- 9 Foundation tubes
- 10 Hoops

SPECIFICATION

Width	22ft	6.7m
Hoop spacing	6ft	1.83m
Overall height	9ft 7in	2.92m
Straight side	4ft 6in	1.37m
Head room*	5ft 10in	1.77m
Hoop diameter		50.8mm
Steel Specification	Z35 galvanised high tensile	
Stabiliser bars per end	7	
Door opening	8ft	2.43m (width)
	7ft	2.13m (height)
Distance over hoop	34ft 5in	10.53m
Door frame	4 x 2in	10 x 5cm
Inner door	3 x 2in	7.6 x 5cm
Height under crop bars**	8ft 4in	2.54m

* 6inch in from side ** if ordered



FIRST TUNNELS

the growing season just got longer